

EL2000 - PN 59002-04

HOW TO SET CIRC.PUMP BEHAVIOR  
SELECT SWITCHES A9 & A10.  
A-9 A-10

NO CIRC. PUMP	OFF	OFF
24-HOUR CIRC	ON	OFF
3*FSHUT OFF	OFF	ON
FILTER/POLLS ONLY	ON	ON

\*A\* DIP SWITCH SETTINGS



ALL UNUSED SWITCHES SHOULD BE OFF.	OFF	ON	MODE	OFF	ON
NO	YES	TEST MODE	<input type="checkbox"/>	<input type="checkbox"/>	1
LOW AMP.	HIGHT AMP.	AMPERAGE SELECT	<input type="checkbox"/>	<input type="checkbox"/>	2
TIME	DURT.	FILTER PRDG. BY DURATION	<input type="checkbox"/>	<input type="checkbox"/>	3
12 Hr	24Hr	TIME DISPLAY IN 24HR	<input type="checkbox"/>	<input type="checkbox"/>	4
Deg F*	Deg C*	DEG F*/C*	<input type="checkbox"/>	<input type="checkbox"/>	5
15min	30min	PUMP TIMEOUT	<input type="checkbox"/>	<input type="checkbox"/>	6
2HR	4HR	P1-L TIMEOUT	<input type="checkbox"/>	<input type="checkbox"/>	7
NO	YES	CLEANUP CYCLE	<input type="checkbox"/>	<input type="checkbox"/>	8
NO	YES	U3 SUPPRESSED FOR 1 HR	<input type="checkbox"/>	<input type="checkbox"/>	9
SEE TABLE ABOVE		CIRC.PUMP BEHAVIOR	<input type="checkbox"/>	<input type="checkbox"/>	10
		CIRC.PUMP BEHAVIOR	<input type="checkbox"/>	<input type="checkbox"/>	11
NO	YES	CIRC P1 1SPD INC. Q3 IN FLTR	<input type="checkbox"/>	<input type="checkbox"/>	12
STORE	RESET	PERSISTENT MEMORY RESET	<input type="checkbox"/>	<input type="checkbox"/>	

\*B\* DIP SWITCH SETTINGS

ALL UNUSED SWITCHES SHOULD BE OFF.	OFF	ON	MODE	OFF	ON
2SPD	1SPD	P-2 2SPD/1SPD	<input type="checkbox"/>	<input type="checkbox"/>	1
NO	YES	P-2 ENABLE	<input type="checkbox"/>	<input type="checkbox"/>	2
OFF	ON	BLOWER ENABLE	<input type="checkbox"/>	<input type="checkbox"/>	3
OFF	ON	F.D. INSTEAD OF SPA LIGHT	<input type="checkbox"/>	<input type="checkbox"/>	4
NO	YES	F.D. INSTEAD OF SPA LIGHT	<input type="checkbox"/>	<input type="checkbox"/>	5
OFF	ON	PANEL BUTTON SEARCHING	<input type="checkbox"/>	<input type="checkbox"/>	6

MANUFACTURE DIP SWITCH \*A\* SETTINGS

ON	1	2	3	4	5	6	7	8	9	10	11	12
↑	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
OFF												

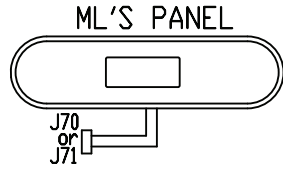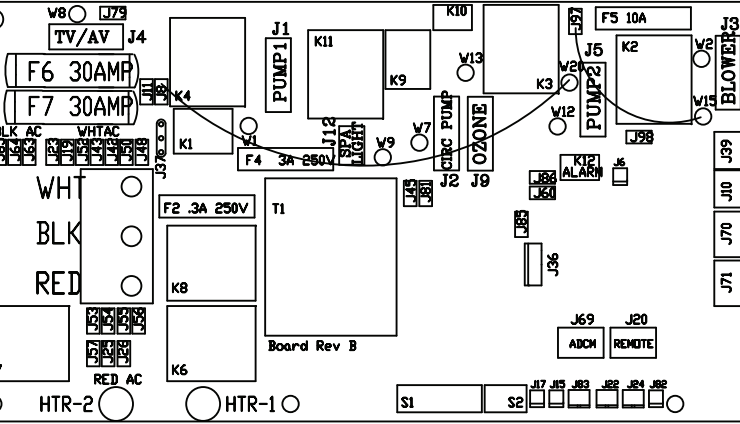

TORQUE RANGE FOR HEATER CONNECTIONS: 30 TO 35 IN. LBS

LOCATION	DEVICE	VOLTAGE RATING	CONNECT FROM	CONNECT TO
J1	2 SPD P1	240V	W1	J53
J5	1 SPD P2	240V	W12	J55
J3	BLOWER	240V	W2	J56
J9	OZONE	120V	W13	J50
J2	CIRC PUMP	240V	W7	J26
J12	SPA LIGHT	12V 12W	W9	J45
J5	TV/AV	120V	W8	J52
HTR1-2	HEATER	240V 5.5KW		

PUMP2 & BLOWER CONFIGURATION	
W15-J97 & SW2-1,2,3 'ON' = BLW & 1SPD P2	
W15-J98 & SW2-2 'ON' = 2SPD P2	

MANUFACTURE DIP SWITCH \*B\* SETTINGS

ON	1	2	3	4	5	6
↑	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
OFF						